


2138

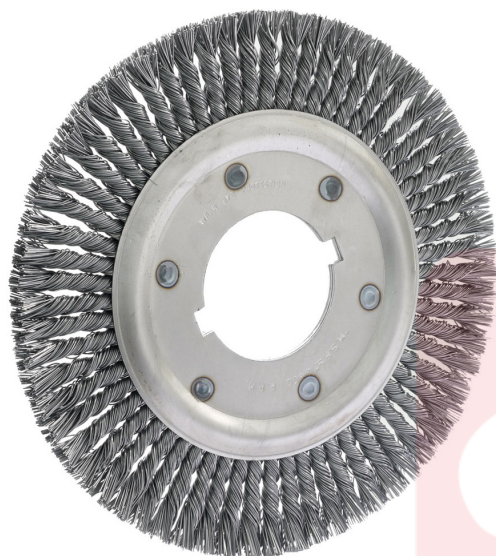

Twist knot wheel brushes suitable for heavy-duty work at high rotation speed. Very high wire density (+ aggressiveness + service life).

**TYPE OF USE**

Deburring and aggressive mechanical pickling.

sitbrush.com

	MM
<b>C mm</b>	83
<b>D mm</b>	300
<b>E mm</b>	14
<b>S mm</b>	53
<b>Z n°</b>	64
<b>Hole mm</b>	83+2ch
<b>Max RPM</b>	3600
<b>CO/IS pach</b>	5
<b>Art.</b>	U12300
<b>Filament</b>	Steel
<b>Ø Filament</b>	0,35mm

	INCH
<b>C inch</b>	3-1/4
<b>D inch</b>	12
<b>E inch</b>	9/16
<b>S inch</b>	2-1/8
<b>Z n°</b>	2-1/8
<b>Hole inch</b>	3-1/4+2ch
<b>Max RPM</b>	3600
<b>CO/IS pach</b>	5
<b>Art.</b>	U12300
<b>Filament</b>	Steel
<b>Ø Filament</b>	0,014"

Le dimensioni, le illustrazioni, le caratteristiche tecniche, le referenze e tutti gli altri dati contenuti nel catalogo possono essere modificati da SIT senza preavviso. Tutte le dimensioni riportate sul catalogo sono da considerarsi nominali e, se non diversamente specificato, sono in mm. Diametri, sporgenze e spessori degli insiemi di filamenti, costituenti le spazzole, sono da considerare tali solo approssimativamente.  
 The dimensions, illustrations, technical characteristics and all other data contained in the catalogue may be changed by SIT without prior notice. All dimensions on the catalogue, unless otherwise specified, are in mm. Diameters, protrusions and thicknesses of sets of filaments forming the brushes are only approximate.