




9609

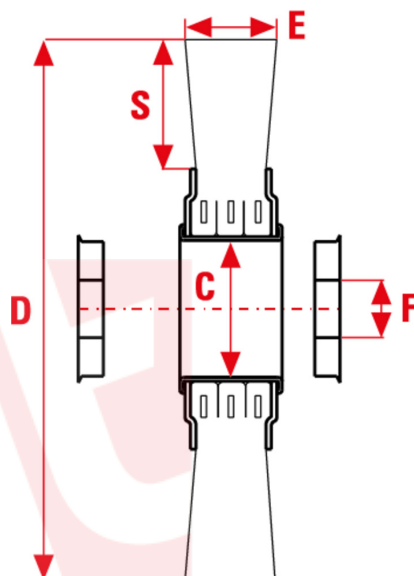

The LIZ cord provides extreme resistance, flexibility and the brush can be used to create different kinds of finishes, depending on the pressure applied.

TYPE OF USE

Deburring, satin finishing and mechanical pickling. Liz steel cord is ideal for tyres buffing machines and for tyre industry.

	MM
C mm	77
D mm	150
E mm	43
S mm	15
Hole mm	77
Max RPM	6000
CO/IS pack	1
Art.	RW 8154
Filament	LIZ steel cord
Ø Filament	0,17mm

	INCH
C inch	3
D inch	5-7/8
E inch	1-3/4
S inch	9/16
Hole inch	3
Max RPM	6000
CO/IS pack	1
Art.	RW 8154
Filament	LIZ steel cord
Ø Filament	0,01"

Le dimensioni, le illustrazioni, le caratteristiche tecniche, le referenze e tutti gli altri dati contenuti nel catalogo possono essere modificati da SIT senza preavviso. Tutte le dimensioni riportate sul catalogo sono da considerarsi nominali e, se non diversamente specificato, sono in mm. Diametri, sporgenze e spessori degli insiemi di filamenti, costituenti le spazzole, sono da considerare tali solo approssimativamente.
The dimensions, illustrations, technical characteristics and all other data contained in the catalogue may be changed by SIT without prior notice. All dimensions on the catalogue, unless otherwise specified, are in mm. Diameters, protrusions and thicknesses of sets of filaments forming the brushes are only approximate.

SIT Società Italiana Tecnospazzole S.p.A

C.F. e Reg. Imprese 03492470376
Via Porrettana, 453
40033 - Casalecchio di Reno (Bo)
ITALY

Partita I.V.A./VAT IT00626581201
Codice SDI: A4707H7
Import/Export BO 008277
R.E.A. BO 295504

Tel. +39 0516113211
Fax +39 051574319
PEC: sit_tecnospazzole@legalmail.it
info@sitbrush.com

**INDUSTRIAL BRUSHES MANUFACTURER
WITH QUALITY MANAGEMENT SYSTEM
CERTIFIED ISO 9001**
sitbrush.com    